



DIM.	TOL.
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY



HOLE IN P.C.B:  $\phi 4.8$   
P.C.B THICKNESS: 1.2~1.7

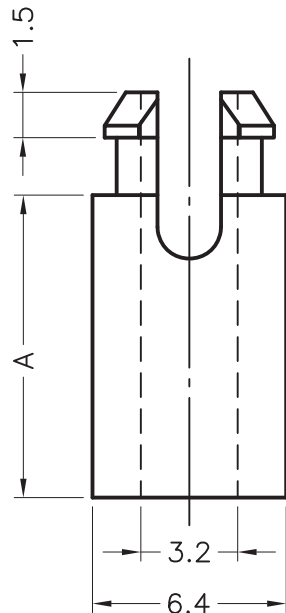


FOR #4 (M3) SCREW

PART NO.	A
5630AA00	3.2
5631AA00	3.5
5632AA00	4.0
5633AA00	4.5
5634AA00	4.8
5635AA00	6.4
5636AA00	7.9
5637AA00	9.5
5638AA00	11.1
5639AA00	12.0
5640AA00	12.7
5641AA00	14.2
5642AA00	15.0
5643AA00	15.9
5644AA00	19.1
5645AA00	22.2
5646AA00	25.4

NOTE: All measurement does not include gate which raises under 0.3mm.



				TITLE SPACER SUPPORT			
				MATERIAL NYLON 66 UL94V-2		DATE 15/09/2015	
				DRAWN S.P.			
PART NUMBER SEE ABOVE		DRAWING NUMBER 15.09.15.5630.E		COLOR NATURAL		CHECK	
SIZE A4	SCALE NTS	UNIT mm	REV A	UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE		APPROVED	