


DIMENSION	TOLERANCE
$L \leq 4$	± 0.10
$4 < L \leq 15$	± 0.20
$15 < L \leq 50$	± 0.30
$50 < L \leq 100$	± 0.40

REVISIONS			
REV	DESCRIPTION	DATE	BY

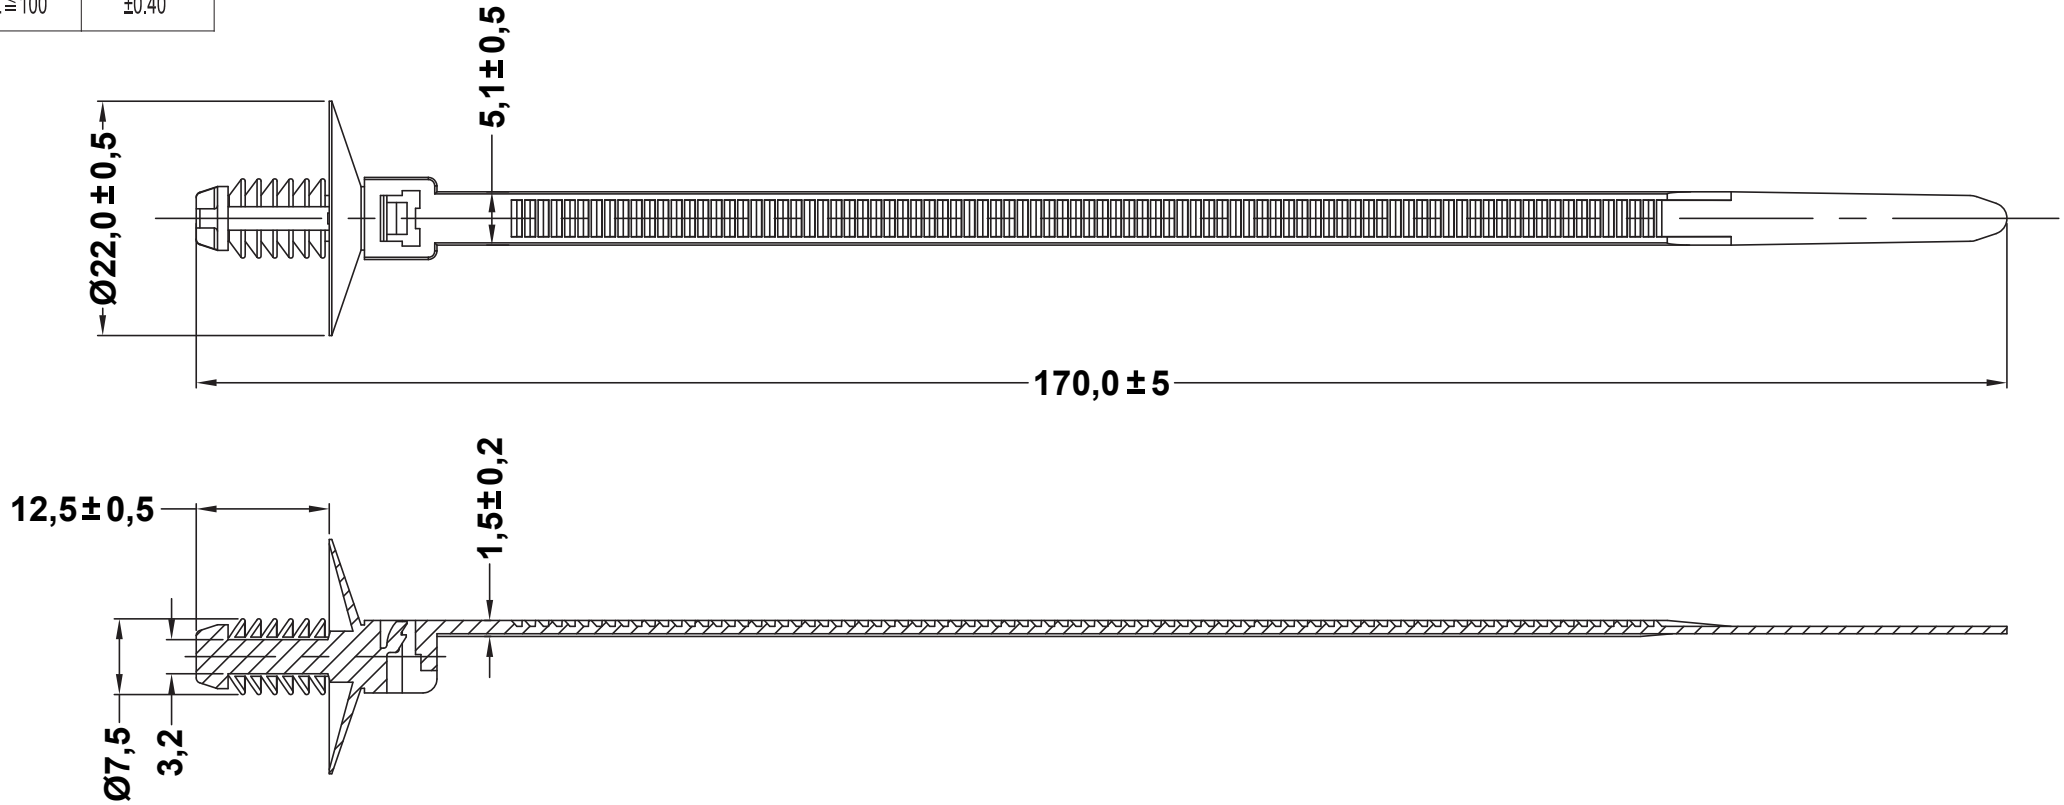

NOTES:

MAX. BUNDLE Ø31,0

MIN. LOOP TENSILE STRENGTH 20,0 kgf

MOUNTING HOLE Ø6,2 - 6,4

MATERIAL GRIP RANGE 0,8 - 7,0 mm

DESCRIPTION		TITLE: BLIND HOLE MOUNT CABLE TIES		DWG UNIT: MM	
MATERIAL:	PA 6.6 V2(UL94)	Modelled in	RHINO 4.0	FILE:	DwN: 16/04/19
COLOUR:	BLACK	TOLLERANCES UNLESS NOTED	SEE ABOVE	SHEET: 1 OF 1	ChkD: DT:19.04.16.12934.0.El
				SCALE: NTS	Part Number: 12934AA01
REV.		DATE		