


REVISIONS			
REV	DESCRIPTION	DATE	BY

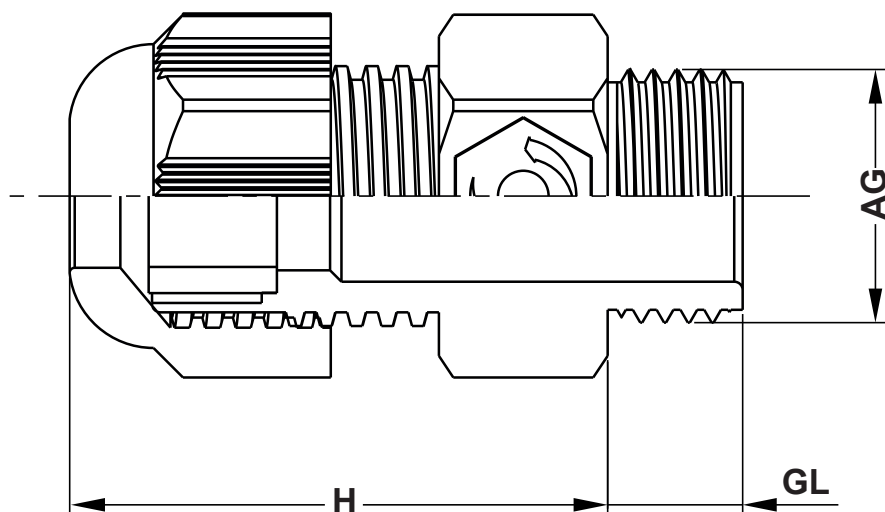

P/N RAL 7035	P/N RAL 9005	AG	H	GL	$\varnothing$ mm	CABLE $\varnothing$	HOLE $\varnothing$	AVERAGE AIR FLOW I/H	WATER INTRUSION mbar
13250AA117035	13250AA019005	M12x1,5	29,0	8,0	19,0	4,0 - 6,5	12,3	70,0	0,1
13251AA117035	13251AA019005	M16x1,5	33,0	8,0	19,0	4,0 - 8,0	16,3	70,0	0,1
13252AA117035	13252AA019005	M16x1,5	34,0	10,0	22,0	5,0 - 10,0	16,3	70,0	0,1

### MATERIAL

Cap nut : Polyamide PA6 V2

Sealing ring : TPV

Gland body : Polyamide PA6 V2

O-ring : NBR / EPDM

Vent Part : Acrylic Co-Polymer on Nylon Support  
(Hydrophobic-Oleophobic)

Connection thread : Metric (EN 60423)

Protection class : IP68

Temperature range : -20 °C +100 °C -30 +150 °C (short term)



TITLE <b>PLASTIC VENTILATION GLANDS</b>	
MATERIAL SEE ABOVE	DATE 06/05/2019
COLOR SEE ABOVE	DRAWN R.F.
PART NUMBER SEE TABLE	CHECK
DRAWING NUMBER 19.05.06.1325X.0.E	APPROVED
SIZE A4	UNLESS OTHERWISE SPECIFIED TOLERANCE
SCALE NTS	UNIT mm.
REV A	