

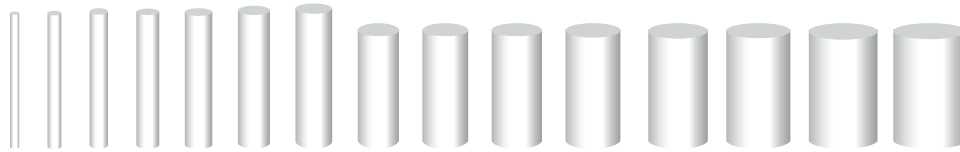



| REVISIONS |             |      |    |
|-----------|-------------|------|----|
| REV       | DESCRIPTION | DATE | BY |
|           |             |      |    |
|           |             |      |    |

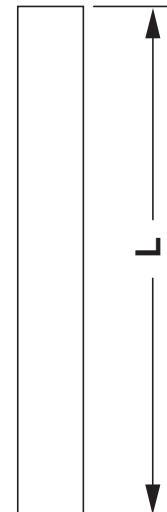

| P/N       | AØ   | L    |
|-----------|------|------|
| 16155NV00 | 2,0  | 30,0 |
| 16156NV00 | 3,0  | 30,0 |
| 16157NV00 | 4,0  | 30,0 |
| 16158NV00 | 5,0  | 30,0 |
| 16159NV00 | 6,0  | 30,0 |
| 16160NV00 | 7,0  | 30,0 |
| 16161NV00 | 8,0  | 25,0 |
| 16162NV00 | 9,0  | 25,0 |
| 16163NV00 | 10,0 | 25,0 |
| 16164NV00 | 11,0 | 25,0 |
| 16165NV00 | 12,0 | 25,0 |
| 16166NV00 | 13,0 | 25,0 |
| 16167NV00 | 14,0 | 25,0 |
| 16168NV00 | 15,0 | 25,0 |
| 16169NV00 | 16,0 | 25,0 |



Flammability: UL94-V0  
 Temperature: -40°C ... +155°C (static)  
 Properties: halogen-free, silicone-free

|   |  |                                      |  |                                      |  |
|---|--|--------------------------------------|--|--------------------------------------|--|
|  |  |                                      |  | TITLE<br><b>PLUGS FOR SPP SERIES</b> |  |
|   |  |                                      |  | MATERIAL<br>PC + GF                  |  |
| PART NUMBER<br>SEE TABLE  |  | DRAWING NUMBER<br>19.09.04.161XX.0.E |  | DRAWN<br>R.F.                        |  |
| SIZE<br>A4  |  | SCALE<br>NTS                         |  | CHECK                                |  |
| UNIT<br>mm.   |  | REV<br>A                             |  | COLOUR<br>NATURAL                    |  |
| UNLESS OTHERWISE SPECIFIED TOLERANCE  |  |                                      |  | APPROVED                             |  |