


DIM.	TOL.
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

**MOUNTING HOLE Ø4,0
THICKNESS 1,8**

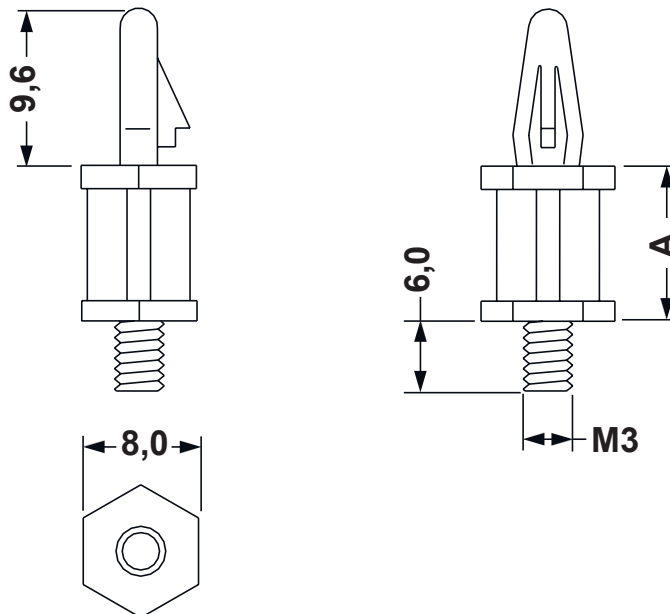

P/N	A
10059AA0103.0	3.0
10059AA0104.0	4.0
10059AA0105.0	5.0
10059AA0106.0	6.0
10059AA0107.0	7.0
10059AA0108.0	8.0
10059AA0109.0	9.0
10059AA0110.0	10.0
10059AA0111.0	11.0
10059AA0112.0	12.0
10059AA0113.0	13.0
10059AA0114.0	14.0
10059AA0115.0	15.0
10059AA0116.0	16.0
10059AA0117.0	17.0
10059AA0118.0	18.0
10059AA0119.0	19.0

P/N	A
10059AA0120.0	20.0
10059AA0121.0	21.0
10059AA0122.0	22.0
10059AA0123.0	23.0
10059AA0124.0	24.0
10059AA0125.0	25.0
10059AA0126.0	26.0
10059AA0127.0	27.0
10059AA0128.0	28.0
10059AA0129.0	29.0
10059AA0130.0	30.0
10059AA0131.0	31.0
10059AA0132.0	32.0
10059AA0133.0	33.0
10059AA0134.0	34.0
10059AA0135.0	35.0
10059AA0136.0	36.0

P/N	A
10059AA0137.0	37.0
10059AA0138.0	38.0
10059AA0139.0	39.0
10059AA0140.0	40.0
10059AA0141.0	41.0
10059AA0142.0	42.0
10059AA0143.0	43.0
10059AA0144.0	44.0
10059AA0145.0	45.0
10059AA0146.0	46.0
10059AA0147.0	47.0
10059AA0148.0	48.0
10059AA0149.0	49.0
10059AA0150.0	50.0
10059AA0151.0	51.0
10059AA0152.0	52.0
10059AA0153.0	53.0

P/N	A
10059AA0154.0	54.0
10059AA0155.0	55.0
10059AA0156.0	56.0
10059AA0157.0	57.0
10059AA0158.0	58.0
10059AA0159.0	59.0
10059AA0160.0	60.0
10059AA0161.0	61.0
10059AA0162.0	62.0
10059AA0163.0	63.0
10059AA0164.0	64.0
10059AA0165.0	65.0

 fastpoint		TITLE METRIC THREADED SPACERS WITH SNAP-LOCK	
		MATERIAL PA66 HB(UL94)	DATE 23/03/2021
PART NUMBER SEE TABLE		DRAWN R.F.	
		COLOR BLACK	CHECK
SIZE A4	SCALE NTS	UNIT mm.	REV A
DRAWING NUMBER 21.03.23.10059.0.E		UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE	
		APPROVED	