


DIM.	TOL.
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

P/N	A
10335AA0005.0	5.0
10335AA0006.0	6.0
10335AA0008.0	8.0
10335AA0010.0	10.0
10335AA0012.0	12.0
10335AA0014.0	14.0
10335AA0016.0	16.0
10335AA0018.0	18.0
10335AA0020.0	20.0
10335AA0022.0	22.0
10335AA0025.0	25.0

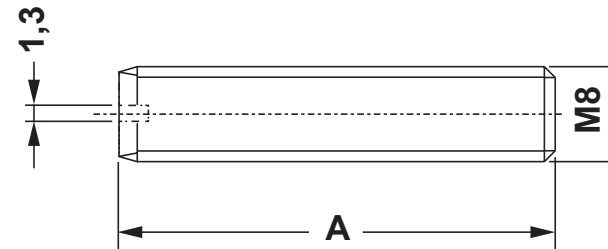

ESTIMATE ACCORDING: EN ISO 24766 (DIN 551)

REV.	DESCRIPTION	DATE	TITLE: THREADED PINS WITH SLIT	DWG UNIT: MM
	MATERIAL: PA 6		Modelled in RHINO 4.0	
	COLOUR: NATURAL		FILE:	DwN: 11/05/21
	WORKING TEMPERATURE: -30°C ~ +100° C		TOLLERANCES UNLESS NOTED	ChkD: DT:21.05.11.XXXXX.0.E
			SEE ABOVE	Part Number: SEE TABLE
			SCALE: NTS	

