


DIM.	TOL.
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

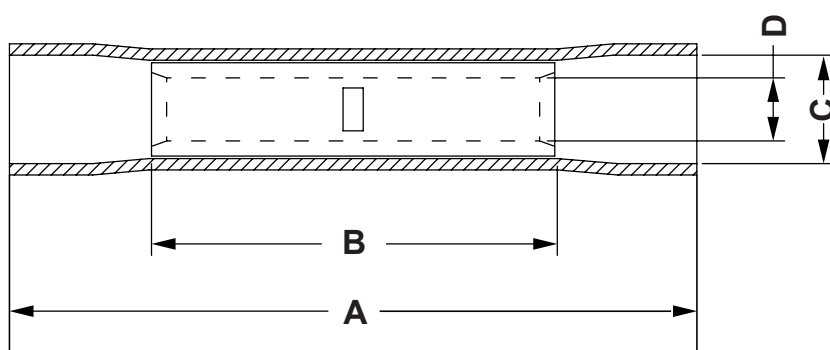

P/N	A	B	C	D	Section mm ²	Colour
16565EB04	36,0	15,0	4,4	1,7	0,5 - 1,5	<i>Red</i>
16566EB08	36,0	15,0	5,2	2,3	1,5 - 2,5	<i>Blue</i>
16567EB06	41,0	15,0	6,5	3,6	1,5 - 2,5	<i>Blue</i>

NOTES:

- RATED VOLTAGE 300V MAX.
- WORKING TEMP. -10° +125°C MAX.
- ISOLATION PE HD

				TITLE HEAT SHRINKABLE INSULATED BUTT CONNECTORS	
				MATERIAL TIN PLATED COPPER	DATE 03/12/2021
				CU-ETP 99.9%	DRAWN A.C.
				COLOR SEE TABLE	CHECK
PART NUMBER SEE TABLE		DRAWING NUMBER 21.12.03.165XX.0.E		UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE	APPROVED
SIZE A4	SCALE NTS	UNIT mm.	REV A		