


DIM.	TOL
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

HOLE IN P.C.B $\varnothing 3.5$
P.C.B THICKNESS 1.2~1.7

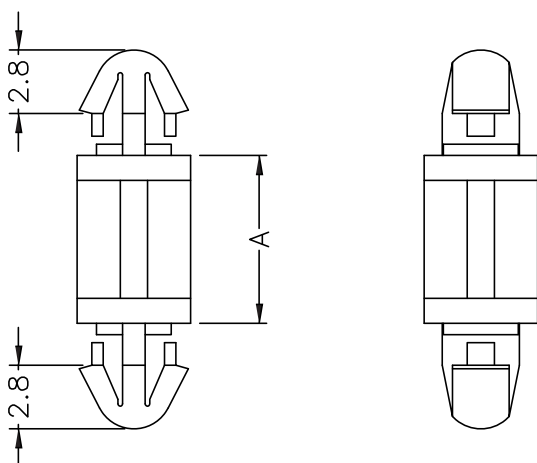

P.C.B THICKNESS 1.2~1.7
HOLE IN P.C.B $\varnothing 3.5$

PART NO.	A
6362 AA0002.50	2,5
6362 AA0003.00	3,0
6362 AA0003.50	3,5
6362 AA0004.00	4,0
6362 AA0004.50	4,5
6362 AA0005.00	5,0
6362 AA0005.50	5,5
6362 AA0006.00	6,0
6362 AA0006.35	6,35
6362 AA0007.00	7,0
6362 AA0008.00	8,0
6362 AA0009.00	9,0
6362 AA0010.00	10,0
6362 AA0011.00	11,0
6362 AA0012.00	12,0
6362 AA0015.00	15,0



TITLE SPACER SUPPORT			
MATERIAL NYLON 66 UL94V-2		DATE 08/09/2015	
		DRAWN S.P.	
COLOR NATURAL		CHECK 	
UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE		APPROVED 	

PART NUMBER SEE TABLE		DRAWING NUMBER 15.09.08.6362.0.E	
SIZE A4	SCALE NTS	UNIT mm.	REV A