
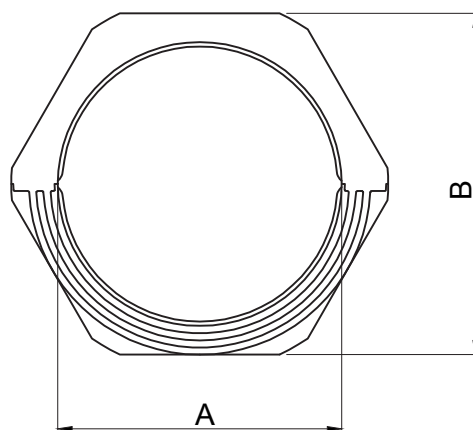
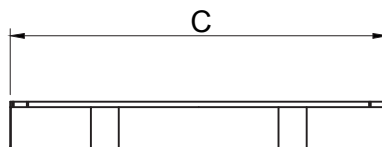
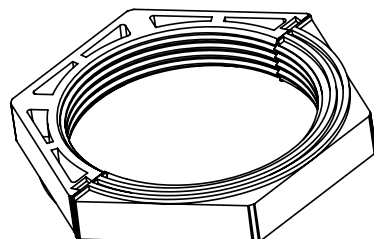



DIM.	TOL.
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

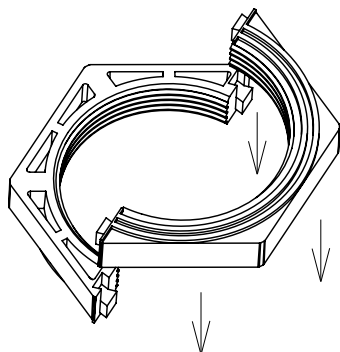

P/N	A	B	C	D
18083FG01	M20	28,0	31,0	7,0
18084FG01	M25	33,0	36,0	7,0
18085FG01	M32	40,0	44,0	7,0
18086FG01	M40	48,0	53,0	7,0
18087FG01	M50	58,0	64,0	7,0
18088FG01	M63	72,0	80,0	7,0

Temperature: -40°C ... +120°C
Properties: halogen-free, silicone-free

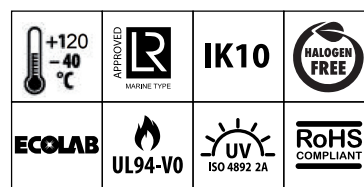

TITLE LOCKNUT	
MATERIAL PA 66	DATE 03/08/2022
UL94-V0	DRAWN A.C.
COLOR BLACK	CHECK
UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE	APPROVED

PART NUMBER SEE TABLE		DRAWING NUMBER 22.08.4.108.0.E	
SIZE A4	SCALE 1:2	UNIT mm.	REV A