
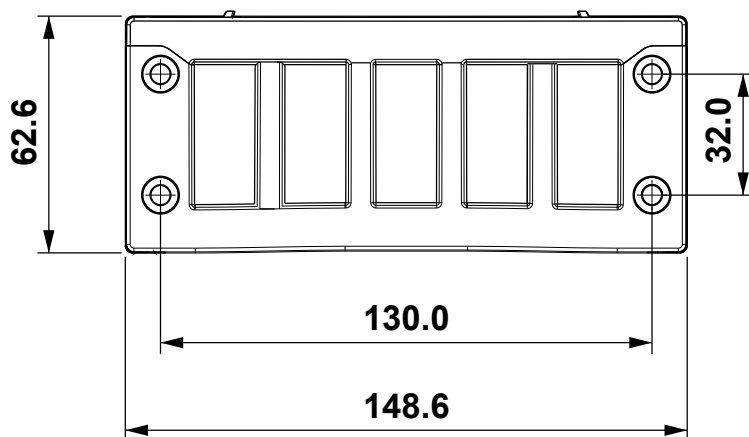
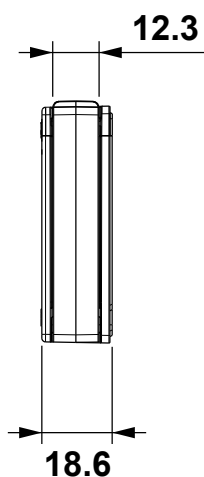

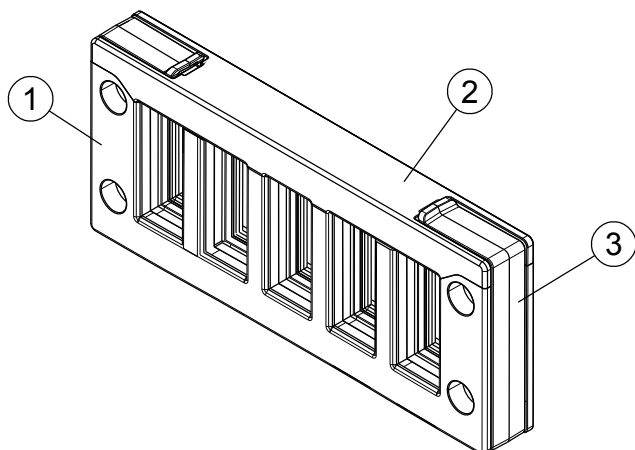


DIM.	TOL.
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY



Temperature: -40°C ... +130°C
Properties: halogen-free, silicone-free

Id	Description	Material	Q.	Recommended cut-out: 112 x 36 mm 		IP54	NEMA 12	 HL3 EN 45545-2	 APPROVED MARKING TYPE
1	Frame	PP+GF	1						IK10
2	Cover	PP+GF	1						
3	Hook	PP+GF	2						
4	Gasket (not visible)	NBR	1						



TITLE SPLITTABLE FRAMES			
MATERIAL SEE TABLE		DATE 03/02/2022	
UL94-V0		DRAWN A.C.	
COLOR BLACK		CHECK	
UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE		APPROVED	

PART NUMBER 15912FG01		DRAWING NUMBER 22.02.03.15912.0.E	
SIZE A4	SCALE 1:2	UNIT mm.	REV A