
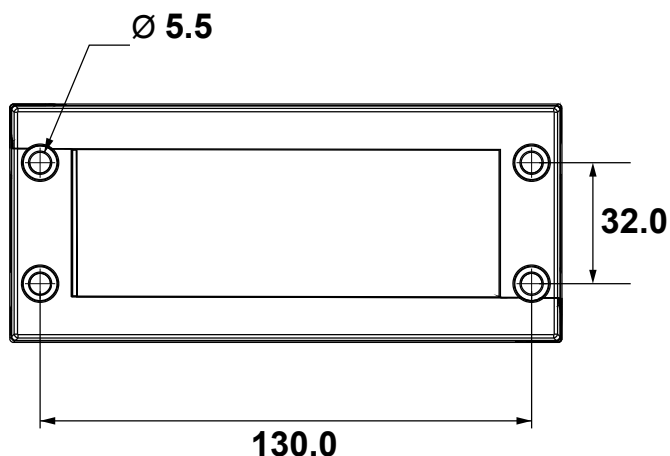
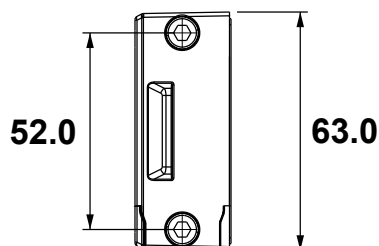
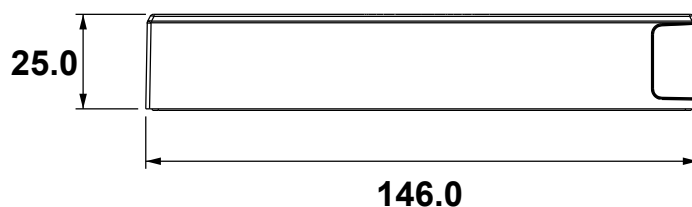
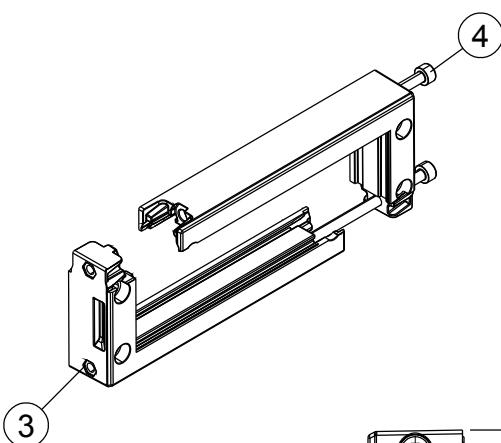
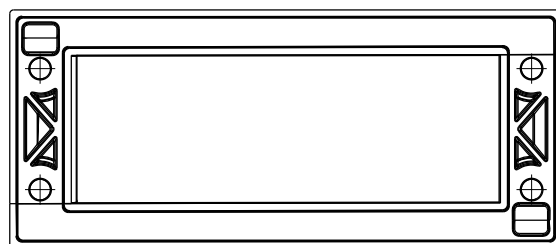


DIM.	TOL.
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

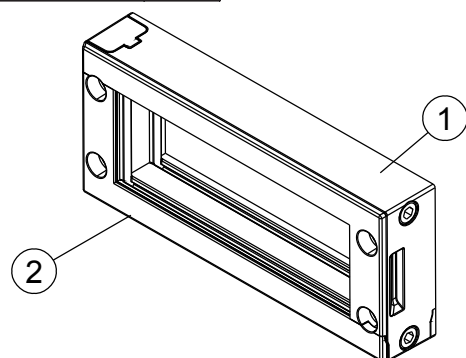

Temperature: -40°C ... +155°C
Properties: halogen-free, silicone-free

Id	Description	Material	Q.	Recommended cut-out: 114 x 40 mm	UL US	IP54	NEMA 12	HL3 EN 45545-2	PP+GF
1	Frame	PP+GF	1		ECOLAB	UL94-V0	UV ISO 4892 2A	RoHS COMPLIANT	IK10
2	Cover	PP+GF	1						
3	Nut	SS304	2						
4	Gasket (not visible)	NBR	1						



TITLE SPLITTABLE FRAMES			
MATERIAL SEE TABLE		DATE 16/05/2022	
		DRAWN A.C.	
COLOR BLACK		CHECK 	
UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE		APPROVED 	

PART NUMBER 16476FG01		DRAWING NUMBER 22.05.16.16476.0.E	
SIZE A4	SCALE 1:2	UNIT mm.	REV A