



DIM.	TOL.
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0



REVISIONS			
REV	DESCRIPTION	DATE	BY

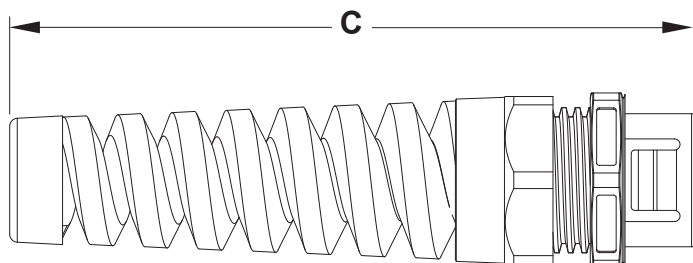

**SUGGESTED
CLEARENCE HOLE
FOR NONTHEADED
MOUNTING**

P/N	A	B	C	APPROX. CABLE DIAMETER	THICKNESS
18515AA01	12,7	11,4	63,5	Ø 5,3 - 5,3	1,6 - 3,2
18514AA01	12,7	11,4	63,5	Ø 6,1 - 6,4	1,6 - 3,2
18517AA01	15,9	14,0	71,9	Ø 5,3 - 5,8	1,6 - 3,2
18516AA01	15,9	14,0	71,9	Ø 5,3 - 8,0	1,6 - 3,2
18519AA01	19,1	16,8	87,9	Ø 5,8 - 6,6	1,6 - 3,2
18518AA01	19,1	16,8	87,9	Ø 5,8 - 10,2	1,6 - 3,2
18521AA01	22,2	19,6	98,0	Ø 6,5 - 7,4	1,6 - 3,2
18520AA01	22,2	19,6	98,0	Ø 6,4 - 11,4	1,6 - 3,2
18523AA01	25,4	22,2	109,5	Ø 7,6 - 10,2	1,6 - 3,2
18522AA01	25,4	22,2	109,5	Ø 8,9 - 13,8	1,6 - 3,2
18525AA01	27,8	24,6	124,5	Ø 9,8 - 12,4	1,6 - 3,2
18524AA01	28,6	25,4	124,5	Ø 11,0 - 17,9	1,6 - 3,2

WORKING TEMPERATURE: -18°C.....+105°C

				TITLE CORDGRIPS	
				MATERIAL PA66 V2 (UL94)	DATE 31/08/2023
PART NUMBER SEE TABLE				DRAWING NUMBER 23.08.31.185.0.E	
				COLOR BLACK	CHECK
SIZE A4	SCALE NTS	UNIT mm.	REV A	UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE	
				APPROVED	