
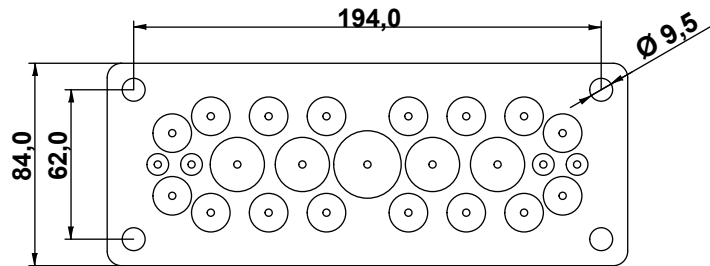


DIM.	TOL.
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

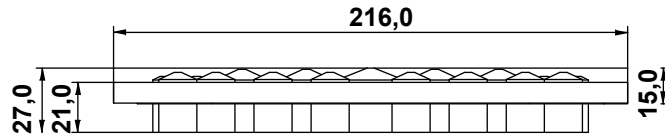

WORKING TEMPERATURE: -40°C ~ +100°C

FLAMMABILITY: V0 (UL94)

CUTOUT: 196,0 x 63,0 mm

PROPERTIES: HALOGEN-FREE

IP RATING: IP65

NO. OF CABLE LEAD-THROUGHS: 25

MAX CABLE Ø 26,0 mm

MIN CABLE Ø 5,0 mm

INSTALLATION RANGE (DIAMETER PER CABLES):

- 4 x 5 - 7 mm
- 4 x 8 - 12 mm
- 12 x 10 - 14 mm
- 4 x 14 - 22 mm
- 1 x 20 - 26 mm

P/N RAL 7035	P/N RAL 9005
18688PS117035	18688PS019005

				TITLE CABLE ENTRY PLATE IP65	
				MATERIAL TPE V0(UL94)	DATE 21/02/2024
PART NUMBER 18688PS				DRAWN E.B.	
				DRAWING NUMBER 24.02.21.18688.0.E	
SIZE A4				COLOR SEE ABOVE	
				CHECK	
SCALE NTS				UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE	
				APPROVED	
UNIT mm.				REV A	