
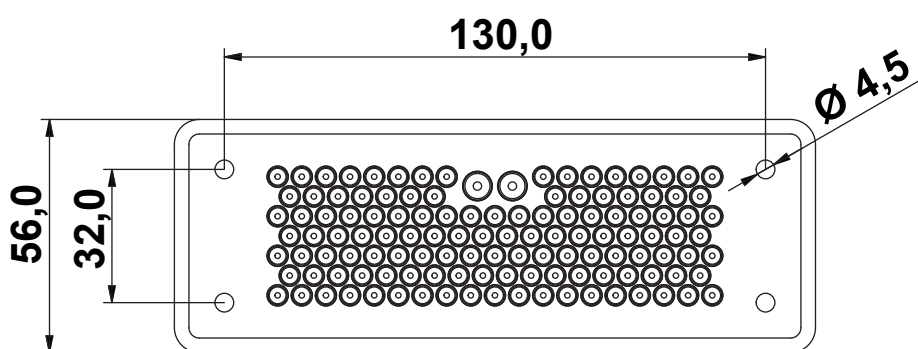


DIM.	TOL.
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

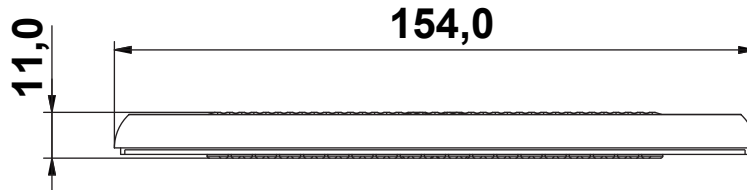

WORKING TEMPERATURE: -40°C ~ +90°C

CUTOUT: 112,0 x 36,0 mm

IP RATING: IP66

FLAMMABILITY: V0 (UL94)

NO. OF CABLE LEAD-THROUGHS: 125

MAX CABLE Ø 5,0 mm

MIN CABLE Ø 2,0 mm

INSTALLATION RANGE (DIAMETER PER CABLES):

- 123 x 1.5 - 3 mm
- 2 x 2.5 - 5 mm



TITLE CABLE ENTRY PLATE IP66		MATERIAL TPE V0 (UL94)	DATE 22/02/2024
		COLOR RAL 7035	DRAWN E.B.
PART NUMBER 18705PS117035	DRAWING NUMBER 24.02.22.18705.0.E	CHECK (blank)	APPROVED (blank)
SIZE A4	SCALE NTS	UNIT mm.	REV A
UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE		APPROVED (blank)	