


DIM.	TOL.
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

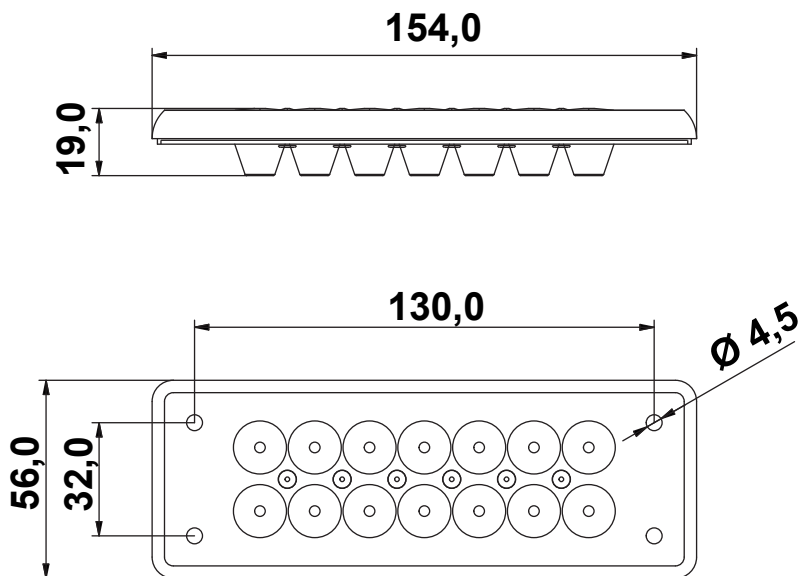

WORKING TEMPERATURE: -40°C ~ +90°C
CUTOUT: 112,0 x 36,0 mm
IP RATING: IP66
FLAMMABILITY: V0 (UL94)
NO. OF CABLE LEAD-THROUGHS: 20
MAX CABLE Ø 12,0 mm
MIN CABLE Ø 2,0 mm
INSTALLATION RANGE (DIAMETER PER CABLES):
 - 6 x 1,5 - 3 mm
 - 14 x 7,2 - 12 mm

				TITLE CABLE ENTRY PLATE IP66	
				MATERIAL TPE V0 (UL94)	DATE 22/02/2024
PART NUMBER 18708PS117035				DRAWING NUMBER 24.02.22.18708.0.E	
				COLOR RAL 7035	CHECK
SIZE A4	SCALE NTS	UNIT mm.	REV A	UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE	APPROVED