
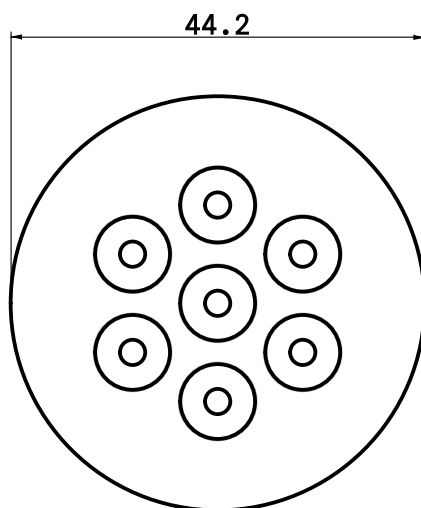


| DIM. | TOL. |
|----------|------|
| 5mm DOWN | ±0.2 |
| 5~20mm | ±0.3 |
| 20~40mm | ±0.4 |
| 40~60mm | ±0.5 |
| 60~100mm | ±0.8 |
| 100mm UP | ±1.0 |

| REVISIONS | | | |
|-----------|-------------|------|----|
| REV | DESCRIPTION | DATE | BY |
| | | | |
| | | | |

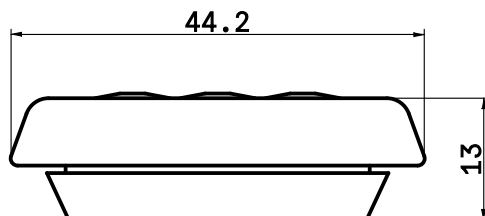

WORKING TEMPERATURE: -40°C ~ +100°C
SIZE: M32
CUT-OUT: Ø32,5
IP RATING: IP65
FLAMMABILITY: V0 (UL94)
PLATE THICKNESS: 1,0 - 4,0mm
INSTALLATION RANGE (Ø): 7 x 1 - 8,0 mm

| | | | | | |
|------------------------------|--|--|--|--|--------------------|
| | | | | TITLE ROUND CABLE ENTRY PLATE IP65 | |
| | | | | MATERIAL TPE V0 (UL94) | DATE 26/06/2024 |
| PART NUMBER 18724PS117035 | | | | DRAWN E.B. | |
| | | | | DRAWING NUMBER 24.06.26.18724.0.E | |
| SIZE A4 | | | | COLOR RAL 7035 | |
| | | | | CHECK | |
| SCALE NTS | | | | UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE | |
| | | | | APPROVED | |
| UNIT mm. | | | | REV A | |
| | | | | | |