
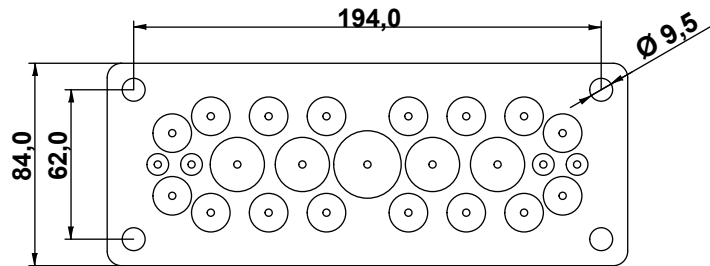


DIM.	TOL.
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

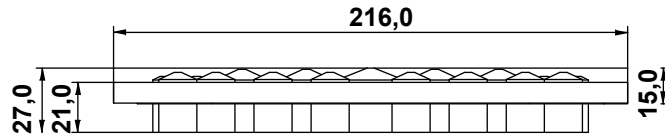

**WORKING TEMPERATURE: -40°C ~ +100°C**

**FLAMMABILITY: HB (UL94)**

**CUTOUT: 196,0 x 63,0 mm**

**PROPERTIES: HALOGEN-FREE**

**IP RATING: IP65**

**NO. OF CABLE LEAD-THROUGHS: 25**

**MAX CABLE Ø 26,0 mm**

**MIN CABLE Ø 5,0 mm**

**INSTALLATION RANGE (DIAMETER PER CABLES):**

- 4 x 5 - 7 mm
- 4 x 8 - 12 mm
- 12 x 10 - 14 mm
- 4 x 14 - 22 mm
- 1 x 20 - 26 mm

				TITLE <b>CABLE ENTRY PLATE IP65</b>	
				MATERIAL TPE HB (UL94)	DATE 07/05/2024
PART NUMBER 18804PS117035				DRAWING NUMBER 24.05.07.18804.0.E	
				COLOR RAL 7035	CHECK
SIZE A4	SCALE NTS	UNIT mm.	REV A	UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE	APPROVED