



DIM.	TOL.
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

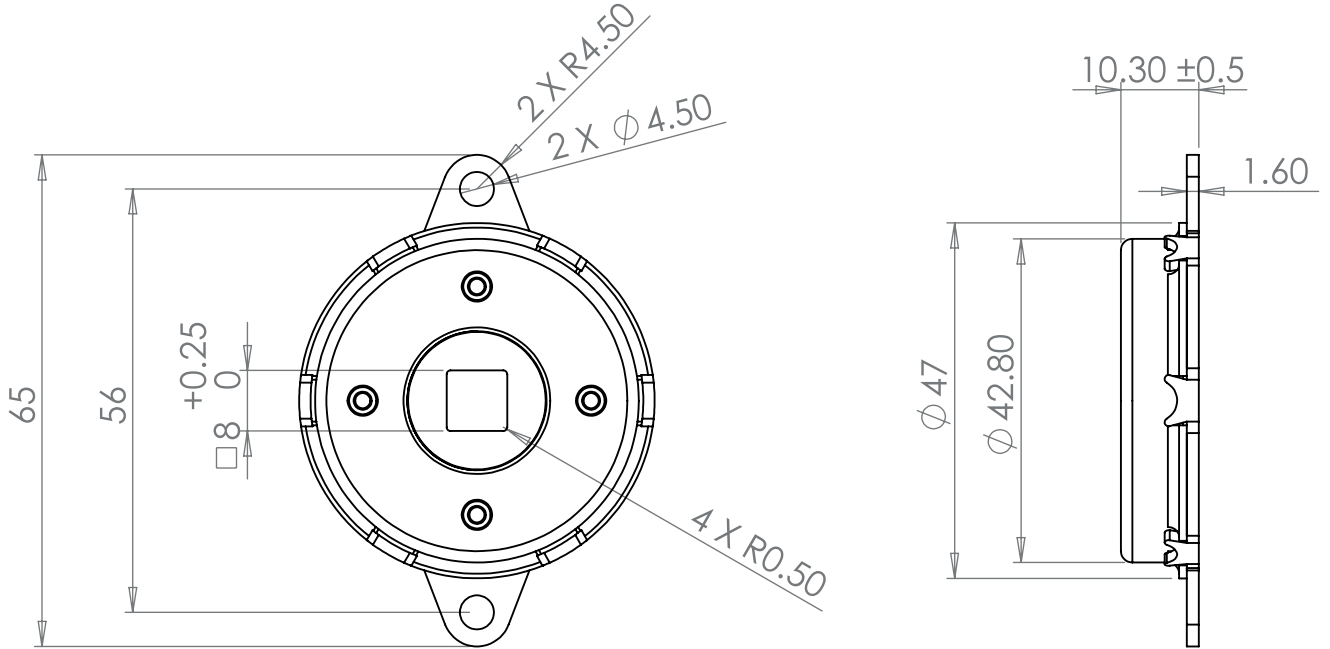

RECOMMENDED SHAFT DIMENSIONS

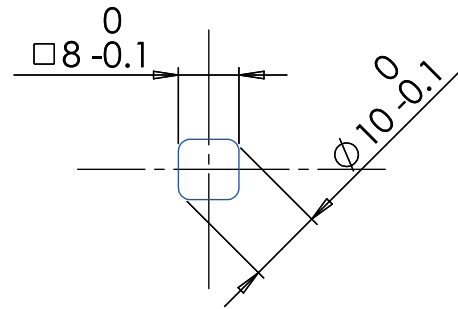

RATED TORQUE: $2.5 \pm 0.3\text{Nm}$ ($25 \pm 3\text{kgf.cm}$)
DAMPING DIRECTION: BOTH DIRECTIONS
MAX. ROTATION SPEED: 50 RPM
MAX. CYCLE RATE: 12 CYCLE/MIN
WORKING TEMPERATURE: $-10 \sim +50^{\circ}\text{C}$

				TITLE HI TORQUE ROTARY DAMPER-BOTH DIRECTIONS	
				MATERIAL STEEL / GLASS FILLED NYLON / SILICONE	
PART NUMBER 19665XX94				DRAWING NUMBER 25.04.23.19665.0.E	
SIZE A4				SCALE NTS	
UNIT mm.				REV A	
COLOR				CHECK	
UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE				APPROVED	
				DRAWN E.B.	