DIM.	TOL.
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

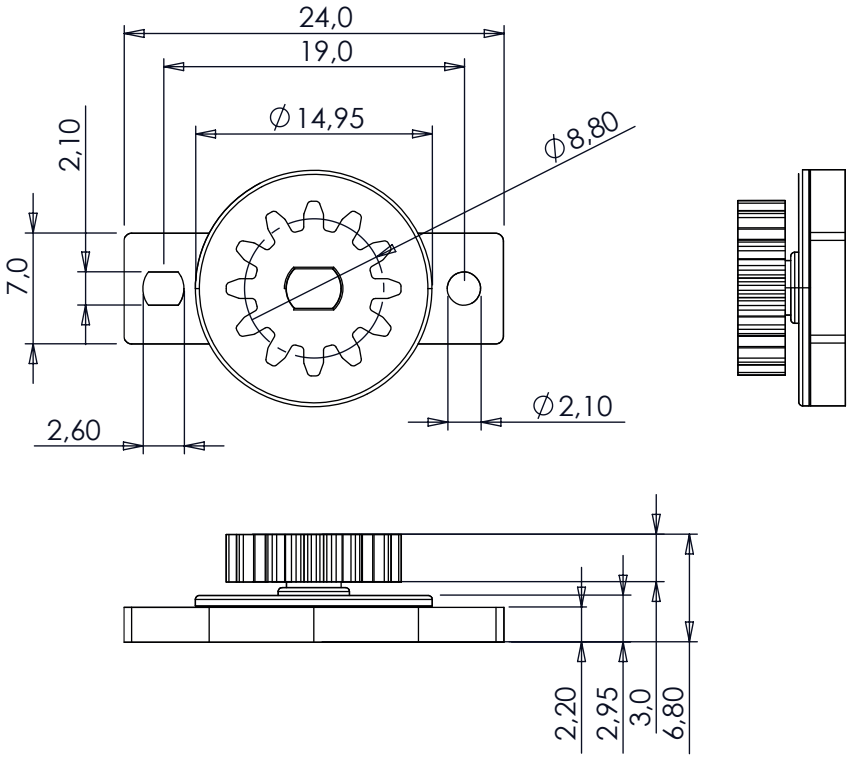

RoHS compliant

P/N	TORQUE	BODY COLOUR	ROTOR COLOUR	GEAR TYPE
19686XX01	0.12 Ncm ± 0.07	BLACK	BEIGE	11a
19687XX01	0.25 Ncm ± 0.08	BLACK	YELLOW	11a
19688XX01	0.30 Ncm ± 0.10	BLACK	GREEN	11a
19689XX01	0.45 Ncm ± 0.12	BLACK	BROWN	11a
19690XX01	0.60 Ncm ± 0.17	BLACK	BLACK	11a
19691XX01	0.95 Ncm ± 0.18	BLACK	RED	11a
19692XX01	1.20 Ncm ± 0.20	BLACK	BLUE	11a
19693XX01	1.50 Ncm ± 0.25	BLACK	PINK	11a
19694XX01	2.20 Ncm ± 0.35	BLACK	ORANGE	11a

GEAR WHEEL POSSIBLE COMBINATIONS:

No. TEETH	10	11a	11b	11c	11d	12	13	14	16
GEAR MODULE	0.8	0.8	0.8	0.6	0.8	0.8	0.8	0.5	0.8
PRESSURE ANGLE	20°	20°	20°	20°	20°	20°	14.5°	20°	20°
NOTES	-	-	ROUNDED EDGES	ROUNDED EDGES	-	-	-	-	-

fastpoint

TITLE **ROTARY DAMPER, SLIM BASE**

MATERIAL POM / PC / RUBBER / SILICONE

DATE 23/04/2025

DRAWN E.B.

PART NUMBER SEE TABLE

DRAWING NUMBER 25.04.23.196XX.0.E

COLOR SEE TABLE

CHECK

SIZE A4 | SCALE NTS | UNIT mm. | REV A

UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE

APPROVED